

Product Specifications

Style Number	VV457	
Construction	Waterproof Foamed Core	
Edge Profile	Enhanced Painted Bevel	
Nominal Dimensions	9" wide, 72" long	
	US Units	Metric Units

Actual Product Width	8.98"	23 cm
Actual Product Length	72.05"	183 cm
Wear Layer Thickness	30 mil (0.03")	0.76 mm
Overall Product Thickness	0.472"	12 mm
Core Thickness	0.354"	9 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.118"	3 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	26.95 sq ft	3 sq m
Pieces per Box	6 pcs	
Weight per Box	68.14 lbs	30.9 kg
Boxes per Pallet	28 boxes	

Colors




2904 Virtue Oak



5037 Genova Oak

Color Variation: V4 - Substantial

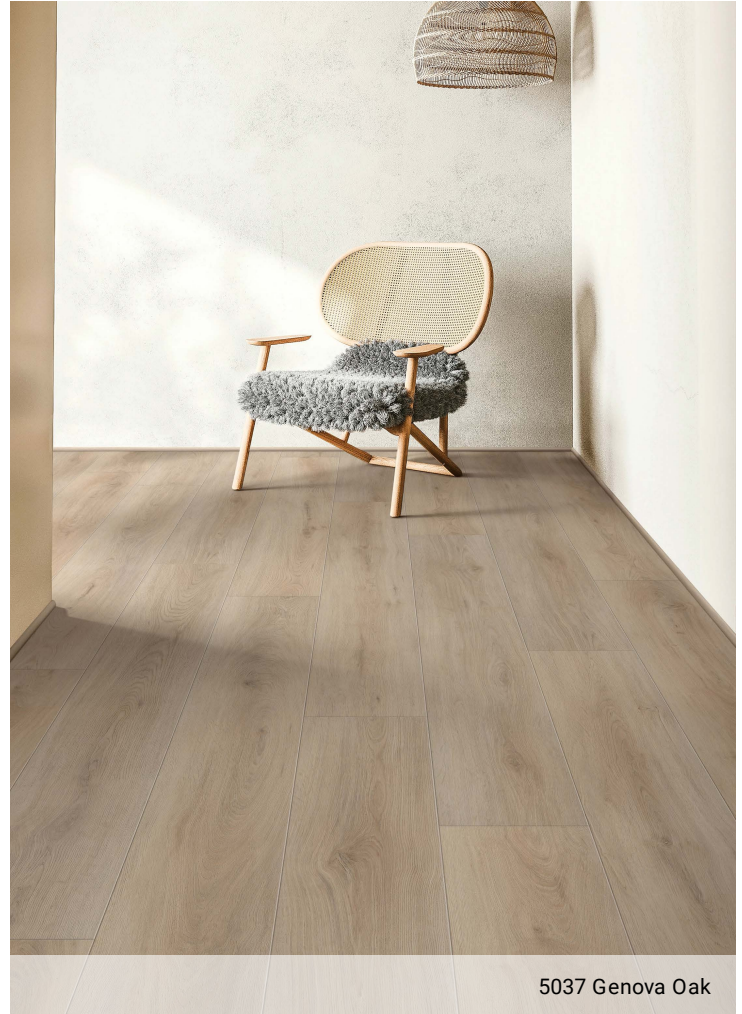

5037 Genova Oak

Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- USF Lifetime
- [Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)
- USF 10 Year Medium Commercial


Certifications

GreenGuard (Certification, Gold, Private Label) Certified


Coordinating Trim




Baby Threshold*
06V26 | 94"

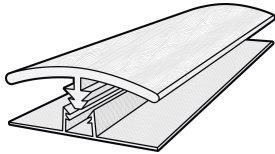


T-Molding*
06V31 | 94"
06W31 | 94"

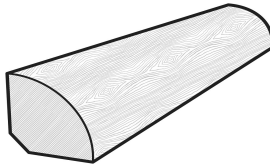

Quarter Round
06V27 | 94"

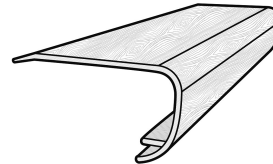

Overlap Stairnose*
06V29 | 94"

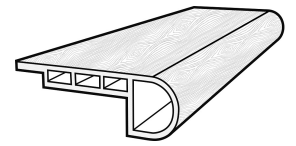

Flush Stairnose
06V30 | 94"

*Packaged with molding track

Stair Tread



Stair Tread
03Z70 | 48"

