


Product Specifications


Style Number	VV023	
Construction	Waterproof Foamed Core	
Edge Profile	Micro Bevel	
Nominal Dimensions	5" wide, 48" long	
	US Units	Metric Units
Actual Product Width	4.96"	13 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.314"	8 mm
Core Thickness	0.256"	6.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.059"	1.5 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	

Packaging

Area per Box	26.47 sq ft	2 sq m
Pieces per Box	16 pcs	
Weight per Box	44.09 lbs	19.99 kg
Boxes per Pallet	42 boxes	

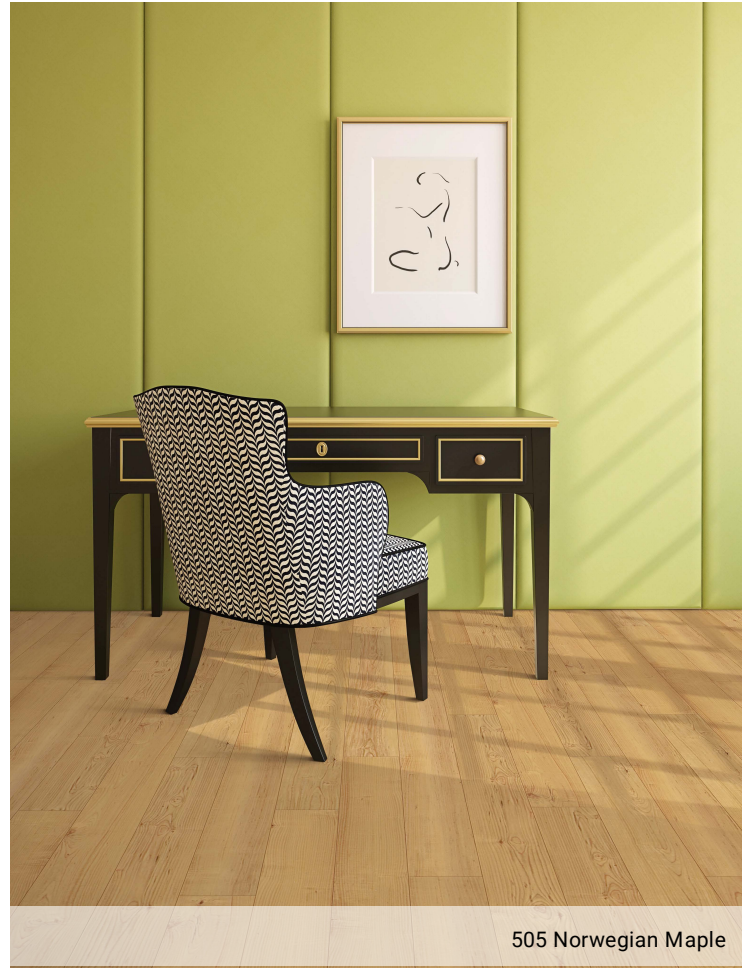

Colors



Color Variation: V4 - Substantial

Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Coretec Lifetime Limited
 Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof
 USF 10 Year Light Commercial
 Com Ub Bond 4100/4151

Certifications

FloorScore Certified
 GreenGuard (Certification, Gold, Private Label) Certified

Coordinating Trim

Baby Threshold*	T-Molding*	Quarter Round	Overlap Stairnose*	Flush Stairnose	Overlap Reducer
BT7CT 94"	TM7CT 94"	QTRCT 94"	01V76 94"	FS7HU 94"	01V52 94"
01V02 94"	02V24 94"	01V27 94"	01V78 94"	02V01 94"	01V54 94"
01V04 94"	02V26 94"	01V29 94"		02V04 94"	

*Packaged with molding track

Stair Tread



Stair Tread
 03Z70 | 48"

