



CERTIFIED  
**PORCELAIN**  
 TILE  
A PFC OF THE TILE ASSOCIATION

# BEVALO™

GLAZED PORCELAIN FLOOR, GLAZED CERAMIC WALL & MOSAIC  
 WITH REVEAL IMAGING®

FLOOR  
 & WALL



AMERICAN OLEAN®  
 PROVEN IN TILE™

AMERICANOLEAN.COM



# BEVALO™

With an upscale look and feel, Bevalo makes a great first impression, while its functionality and durability ensure long-term appeal. Its crisp, clean graphics and contemporary color palette exhibit a trendsetting style. The superior coordination between floor, wall and mosaic combinations adds to its dynamic beauty.

Photo features Bevalo Mist 12 x 12 field tile on the floor and Mist 10 x 14 wall tile and 3 x 3 mosaic on the reception counter.

# BEVALO™

GLAZED PORCELAIN FLOOR, GLAZED CERAMIC WALL & MOSAIC  
WITH REVEAL IMAGING®

## GLAZED PORCELAIN FLOOR TILE


---



DOVE BV95



MIST BV96



CHARCOAL BV97



EARTH BV98

## 10 x 14 GLAZED CERAMIC WALL TILE

---



DOVE BV95



MIST BV96




CHARCOAL BV97



EARTH BV98

## 3 x 3 GLAZED CERAMIC MOSAIC


---



DOVE BV95



MIST BV96



CHARCOAL BV97



EARTH BV98

# BEVALO™

GLAZED PORCELAIN FLOOR, GLAZED CERAMIC WALL & MOSAIC WITH REVEAL IMAGING®


## SIZES, SHADE VARIATION & PRICING




**18 x 18 FLOOR TILE**  
(17-13/16" x 17-13/16")  
(45.20 cm x 45.20 cm)

**12 x 24 FLOOR TILE**  
(11-13/16" x 23-13/16")  
(30.00 cm x 60.48 cm)

**12 x 12 FLOOR TILE**  
(11-13/16" x 11-13/16")  
(30.00 cm x 30.00 cm)



**10 x 14 WALL TILE** □  
(9-13/16" x 13-15/16")  
(24.99 cm x 35.40 cm)



**3 x 3 MOSAIC** ■ □  
(12" x 24" Dot Mounted Sheet)  
(30.48 cm x 60.96 cm Sheet)

■ Dot-Mounted  
□ Ceramic body

**TILE THICKNESS:** 5/16" (18 x 18, 12 x 12 & 10 x 14), 3/8" (12 x 24), 1/4" Mosaic  
**RECOMMENDED GROUT JOINT:** 3/16" Floor (overlap should not exceed 33% when installing tile with a length of 15" or greater in a staggered brick-joint pattern), 1/16" Wall, 1/8" Mosaic  
**RELATIVE PRICING:** Medium

## PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Floor	< 0.5%	> 275 lbs.	8.0	Resistant	4 (BV95, BV96) 3 (BV97, BV98)
Wall	< 20.0%	120 - 230 lbs.	4.0 - 6.0	Resistant	N/A
Mosaic	< 3.0%	> 250 lbs.	8.0	Resistant	4 (BV95, BV96) 3 (BV97, BV98)

### CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

### INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

### SETTING

- Latex modified thin-set
- Epoxy

### GROUTING

- Sanded grout for floor & mosaic
- Unsanded grout for wall
- Epoxy grout

Cover photo features Bevalo Mist 12 x 12 field tile on the floor and Mist 10 x 14 wall tile and 3 x 3 mosaic on the reception counter.

## NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

All or select items within this series are made in the USA. For more information visit [americanolean.com/MadeInUSA](http://americanolean.com/MadeInUSA).

For additional information, refer to "Factors to Consider" at [americanolean.com/Factors](http://americanolean.com/Factors).




Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE  
©2016 AMERICAN OLEAN (10/16)



AMERICAN OLEAN®  
PROVEN IN TILE™

## TRIM

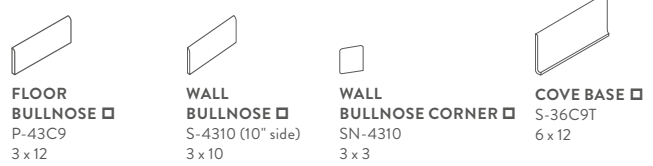

**FLOOR BULLNOSE** □  
P-43C9  
3 x 12

**WALL BULLNOSE** □  
S-4310 (10" side)  
3 x 10

**WALL BULLNOSE CORNER** □  
SN-4310  
3 x 3

**COVE BASE** □  
S-36C9T  
6 x 12



**COVE BASE OUTCORNER** □  
SC-36C9T  
6 x 1

Floor bullnose, cove base and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

□ Ceramic body

## FLOOR APPLICATIONS

(EXCLUDES WALL TILE)	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

## OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●*
Pool Linings	●**

### APPLICATION NOTES:

\* Field tile and mosaic suitable. Mosaic also suitable for residential and light commercial shower floors.

\*\* Does not apply to wall tile

\*\*\* Mosaic only

Floor tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Wall tile & mosaic suitable for exterior applications in non-freezing climates only when proper installation methods are followed.



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®

