

Product Specifications

Style Number	VV024	
Construction	Waterproof Foamed Core	
Edge Profile	Micro Bevel	
Nominal Dimensions	7" wide, 48" long	
	US Units	Metric Units
Actual Product Width	7.13"	18 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.314"	8 mm
Core Thickness	0.256"	6.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.059"	1.5 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	

Packaging

Area per Box	38.03 sq ft	4 sq m
Pieces per Box	16 pcs	
Weight per Box	63.05 lbs	28.59 kg
Boxes per Pallet	35 boxes	



705 Ivory Coast Oak

Colors



705 Ivory Coast Oak

Color Variation: V3 - Moderate



707 Blackstone Oak

Color Variation: V4 - Substantial



716 Midway Oak

Color Variation: V2 - Slight

Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

USF Lifetime

[Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)

10 Year Light Commercial


Com Ub Bond 4100/4151

Certifications

FloorScore Certified

GreenGuard (Certification, Gold, Private Label) Certified

Coordinating Trim

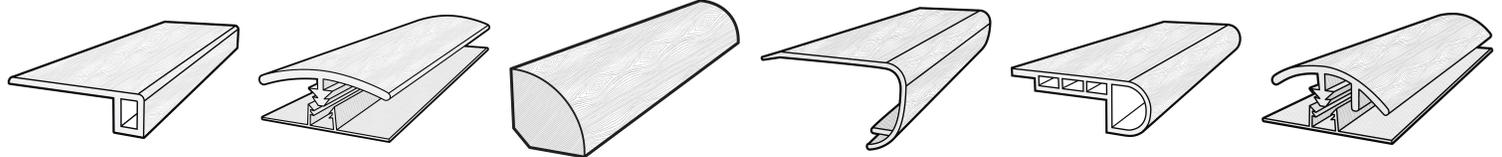

Baby Threshold*

- BT7CT | 94"
- 01V02 | 94"
- 01V06 | 94"

T-Molding*

- TM7CT | 94"
- 02V24 | 94"
- 02V28 | 94"

Quarter Round

- QTRCT | 94"
- 01V27 | 94"
- 01V31 | 94"

Overlap Stairnose*

- 01V76 | 94"
- 01V80 | 94"

Flush Stairnose

- FS7HU | 94"
- 02V01 | 94"
- 02V06 | 94"

Overlap Reducer

- 01V52 | 94"
- 01V56 | 94"

*Packaged with molding track

Stair Tread



Stair Tread

03Z70 | 48"

