



KENDAL SLATE™

GLAZED PORCELAIN FLOOR & MOSAIC
WITH REVEAL IMAGING®

FLOOR



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

KENDAL SLATE™

Kendal Slate is an exquisite combination of beauty and strength. Its rich complexion flawlessly captures a true interpretation of natural slate. It is the premier choice for realistic, classic design enhanced with innovative Reveal Imaging™. Embrace this luxurious collection with remarkable true visuals, smooth, enticing texture and easy maintenance that comes standard in porcelain tile.

Photo features Kendal Slate™ Easdale Neutral 12 x 12 in brickwork pattern.

KENDAL SLATE™

GLAZED PORCELAIN FLOOR & MOSAIC
WITH REVEAL IMAGING®


FLOOR TILE



AMBLESIDE BEIGE KS01



EASDALE NEUTRAL KS02

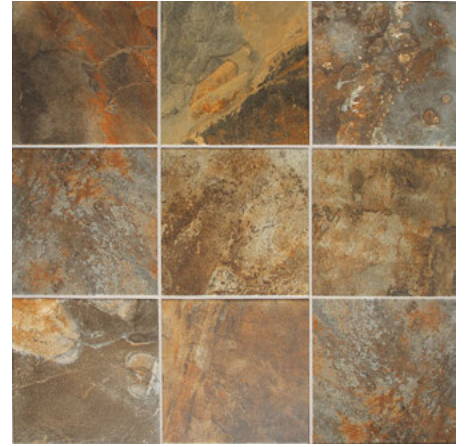

CARLISLE BLACK KS03

3 x 3 MOSAIC



AMBLESIDE BEIGE KS01



EASDALE NEUTRAL KS02



CARLISLE BLACK KS03

KENDAL SLATE™

GLAZED PORCELAIN FLOOR & MOSAIC
WITH REVEAL IMAGING®

SIZES, SHADE VARIATION & PRICING

18 x 18 FIELD TILE
(17-3/4" x 17-3/4")
(45.20 cm x 45.20 cm)

12 x 12 FIELD TILE
(11-13/16" x 11-13/16")
(30.00 cm x 30.00 cm)

6 x 6 FIELD TILE
(5-13/16" x 5-13/16")
(14.70 cm x 14.70 cm)

3 x 3 MOSAIC ■
(12" x 12" Sheet)
(30.00 cm x 30.00 cm Sheet)

■ Mosaic tile is mesh-mounted on 12 x 12 sheets.
Floor field is modular when same caliber is used.

RANDOM (V4)

TILE THICKNESS: 5/16"
RECOMMENDED GROUT JOINT: 3/16" Floor
(overlap should not exceed 33% when installing rectangular size in a staggered brick-joint pattern), 1/8" Mosaic
RELATIVE PRICING: Medium to High

PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Field & Mosaic	< 0.5%	> 275 lbs.	8.0	Resistant	4

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

SETTING

- Latex modified thin-set
- Epoxy

GROUTING

- Sanded grout
- Epoxy grout

Cover photo features Kendal Slate Carlisle Black 12 x 12 on the floor in a grid pattern.

NOTES

SPECIAL INSTALLATION REQUIREMENT: Strong random shading is a part of the natural beauty of this product. To achieve the maximum intended results, tile should be pulled from multiple cartons and placement decided upon prior to installation.

Since there is shade variation in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

All or select items within this series are made in the USA. For more information visit www.americanolean.com.

Use of a latex modified thin-set is recommended for proper installation.

For additional information, refer to "Factors to Consider" at <http://americanolean.com/factors-to-consider.cfm>.



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE
©2016 AMERICAN OLEAN (02/16)



AMERICAN OLEAN®
PROVEN IN TILE™

TRIM

BULLNOSE
S-43C9
3 x 12

COVE BASE □
S-36C9T
6 x 12

COVE BASE OUTCORNER □
SC-36C9T
6 x 1

□ Ceramic Body

Bullnose, Cove Base and Cove Base Outcorner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

FLOOR APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit www.americanolean.com/dcof.

OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●
Pool Linings	●*

APPLICATION NOTES:

* 6 x 6 and 3 x 3 mosaic only.

Field and Mosaic tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®

